

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG


- Material
- ①Screws : M2.0 steel, Zinc plated,
“—”slot type
- ②Housing : PA66, UL94V-0
- ③Clamp : Brass, Ni plated
- ④Pin header : Brass, Tin plated

- Electrical UL IEC
- Rated voltage : 150V 130V
- Rated current : 10A 10A
- Insulation resistance: 500MΩ/DC500V
- Withstanding Voltage : AC1500V/1min
- Wire range: 26-16AWG 1.5mm²

- Mechanical
- Operating temperature: -40℃~+105℃
- Soldering temperature: 250℃±5/5sec
- Torque: 0.2N.m (1.77Lb.in)
- Strip length: 5-6mm

HOW TO ORDER

KF124D-3.5-XXP-1 X-XXXXX

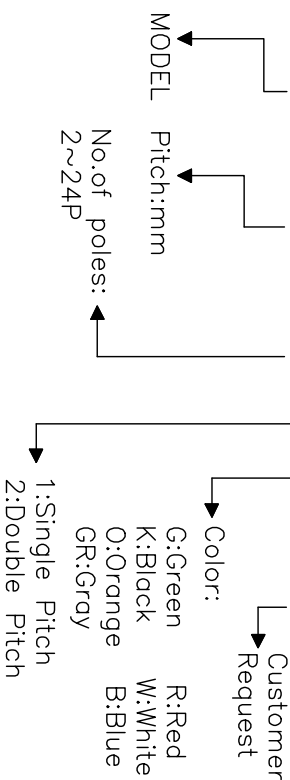

N=Number of Poles		
Dim P=(N-1)x3.50		
Dim L=Nx3.50		
Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

GENERAL TOLERANCE





ANGLE TOLERANCE

X. ±0.5	X. ±5°
.X ±0.3	.X ±3°
.XX ±0.1	.XX ±1°

DRAWING TYPE	CUSTOMER
--------------	----------

SCALE	1:1	SHEET	1 OF 1
-------	-----	-------	--------

DRAWING NO.	XP0012016-xxxx
-------------	----------------

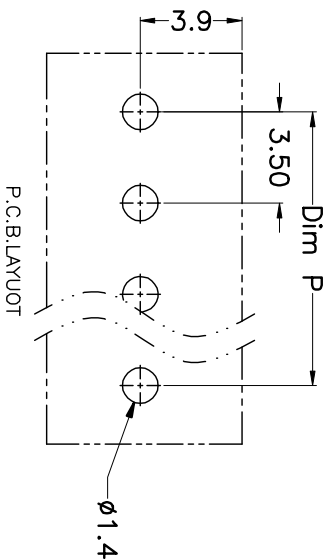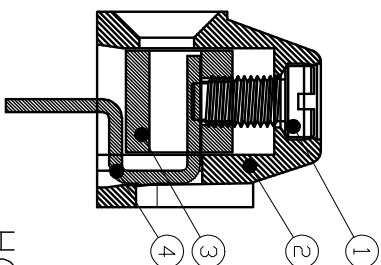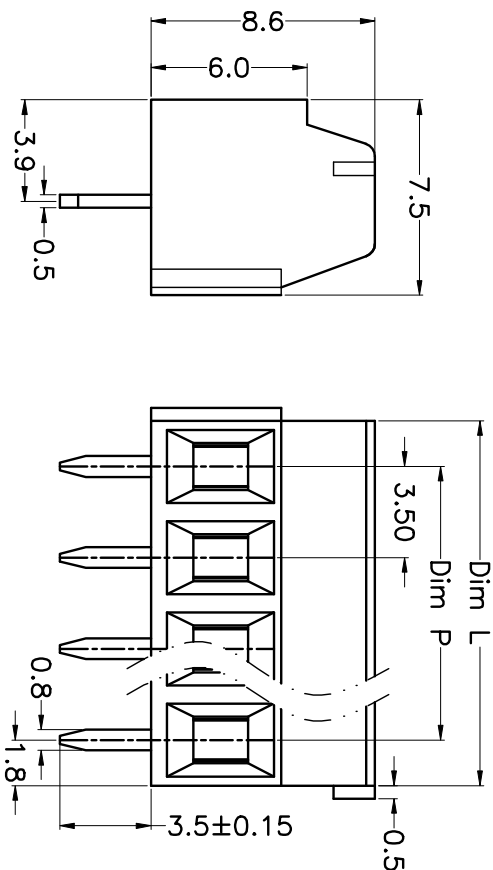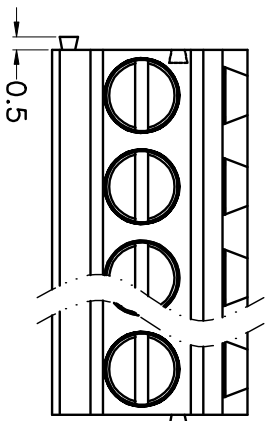

P.C.B.LAYOUT

KF 慈溪市凯峰电子有限公司

KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD