



REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

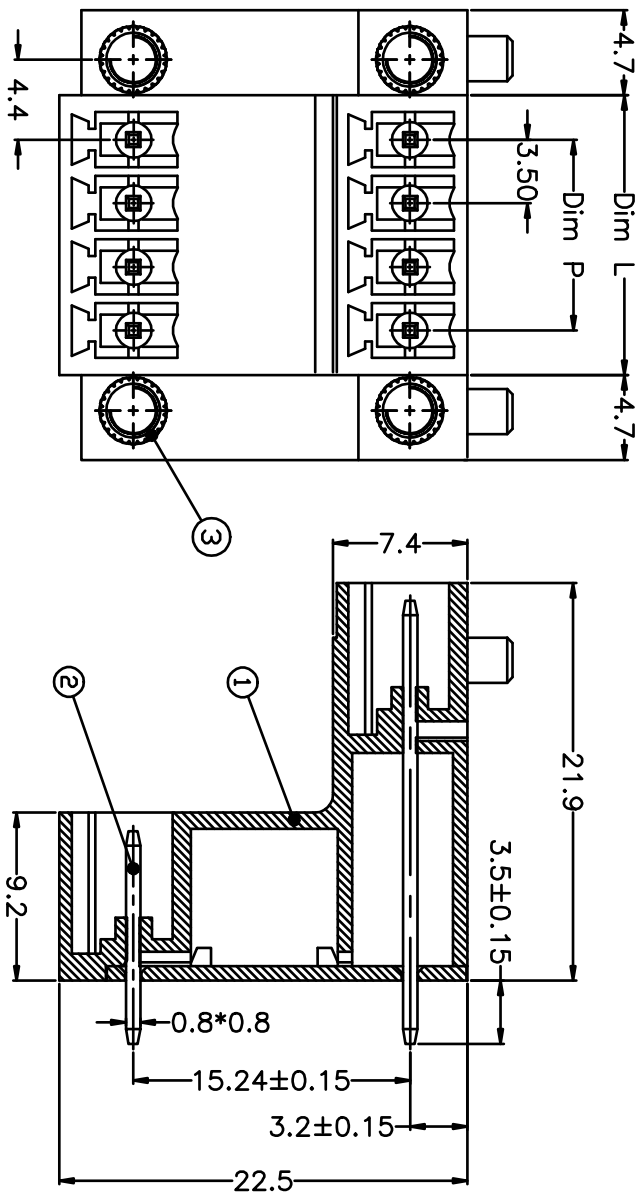

- Material
①Housing : PA66, UL94V-0
②Pin header : Brass, Tin plated
③Nut : M2.5,Brass
- Electrical
UL IEC
Rated voltage : 300V 250V
Rated current : 8A 7A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC1500V/1min
- Mechanical
Operating temperature: -40℃~+105℃
Soldering temperature: 250℃±5/5sec

HOW TO ORDER

KF12EVTM-3.5-XXP-2 X-XXXXX

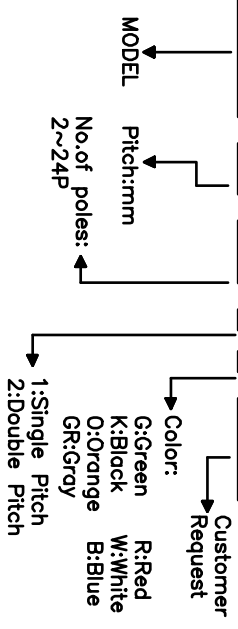

N=Number of Poles
Dim P=(N-1)x3.50
Dim L=Nx3.50+1.4

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

GENERAL TOLERANCE ANGLE TOLERANCE

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5 .X ±0.3 .XX ±0.1	X. ±5° .X ±3° .XX ±1°
DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	XP0012016-xxxx

PROJECTION TITLE

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	KF12EVT

KF12EVTM-3.5-XXP