

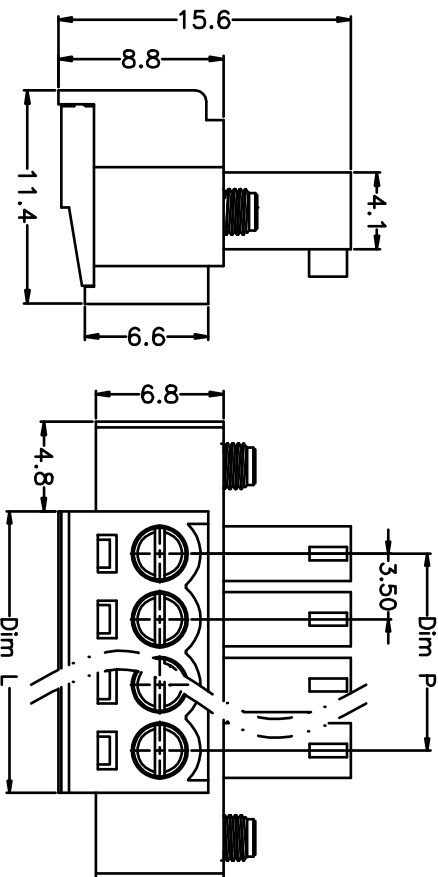


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

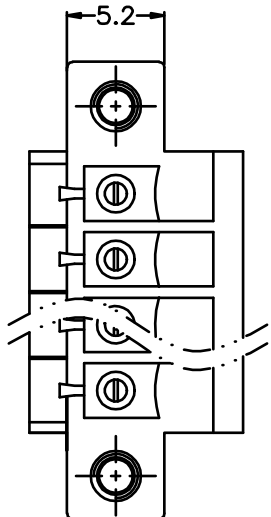


- Material
①Screws : M2.0 steel, Zinc plated,“-”slot type
②Housing : PA66, UL94V-0
③Contact : Phosphor bronze,Ni plated
④Clamp : Brass, Ni plated
⑤Cover : PA66, UL94V-0

- Electrical UL IEC
Rated voltage : 300V 250V
Rated current : 8A 7A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC1500V/1min
Wire range: 28-16AWG 0.5-1.5mm²

- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃±5/5sec
Torque: 0.2N.m (1.77Lb.in)
Strip length: 6-7mm

HOW TO ORDER

KF2EDGM-Y-3.5-XXP-1 X-XXXXX

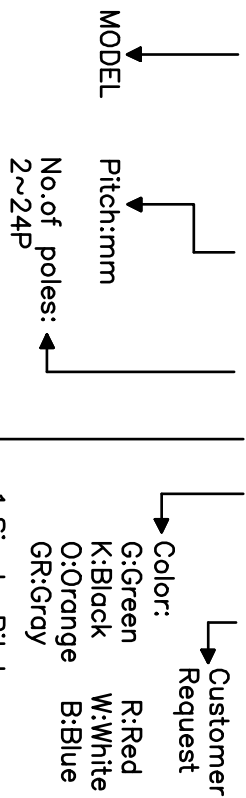

N=Number of Poles
Dim P=(N-1)x3.50
Dim L=Nx3.50+0.8

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	
X, .X	±0.5	X, .X	±5°	mm	KF2EDGM-Y-3.50-XXP	
.XX	±0.3	.X	±3°	A4	KF2EDGM-Y	
.XX	±0.1	.XX	±1°	SHEET SIZE	SERIES KF2EDGM-Y	
DRAWING TYPE	CUSTOMER	SCALE	1:1	SHEET	1 OF 1	
DRAWING NO.	XP0012016-xxxx					

KF 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CO.,LTD